

TAM-101

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:

E. KUBO et al.

Serial No.: 09/996,893

Art Unit: 2637

Filed: November 30, 2001

Examiner: J. Corrielus

For: SEMICONDUCTOR DEVICE

TRANSMITTAL OF CERTIFIED PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Submitted herewith is a certified priority document (UK 0029365.4) of a corresponding United Kingdom patent application for the purpose of claiming foreign priority under 35 U.S.C. § 119. An indication that this document has been safely received would be appreciated.

Respectfully submitted,

John R. Mattingly
Registration No. 30,293
Attorney for Applicants

MATTINGLY, STANGER, MALUR & BRUNDIDGE, P.C.
1800 Diagonal Road, Suite 370
Alexandria, Virginia 22314
(703) 684-1120

Date: August 17, 2005

This Page Blank (uspto)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

The undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents originally filed in connection with the patent application identified therein together with the statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in a certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in the certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Kubo et al
MATTINGLY, STANGER MAHUR
& Brondidge P.C.
SN 09/996893

Signed

Dated 25 January 2002

CERTIFIED COPY OF
DOCUMENT

This Page Blank (uspto)

Patents Form 1/77

Patents Act 1977
(Rule 1)

The
Patent
Office

1/77

7/77

04DEC00 230530Z-1 002094
001/0790 0.00-0029365.4

Request for grant of a patent



1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference 03 37341

2. Patent application number **0029365.4** **01 DEC 2000**

3. Full name, address and post code of the or each applicant
Hitachi Micro Systems Europe Ltd
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire, SL6 8YA

Patents ADP number

If the applicant is a corporate body, give the country/state of its incorporation GB

8034548001

4. Title of the invention SEMICONDUCTOR DEVICE

5. Name of your agent VENNER, SHIPLEY & CO

"Address for service" in the United Kingdom to which all correspondence should be sent

20 LITTLE BRITAIN
LONDON
EC1A 7DH

Patents ADP 1669004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number

Country	Priority application number	Date of filing
---------	-----------------------------	----------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier application	Date of Filing
-------------------------------	----------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if:
a) any applicant in 3. above is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body)

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 24

Claim(s) 3

Abstract 1

Drawing(s) 8 ⁶

10. If you are also filing any of the following state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 6

Request for preliminary examination and search (*Patents Form 9/77*) -

Request for substantive examination (*Patents Form 10/77*) -

Any other documents

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

1 December 2000

Matthew Read

12. Name and daytime telephone number of person to contact in the United Kingdom

MATTHEW READ
020 7600 4212

Statement of inventorship and
of right to grant of a patent



7/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference	03 37341	
2. Patent application number	0029365.4	F1 DEC 2000
3. Full name, address and post code of the or each applicant	Hitachi Micro Systems Europe Ltd Whitebrook Park Lower Cookham Road Maidenhead Berkshire, SL6 8YA	
Patents ADP number		
If the applicant is a corporate body, give the country/state of its incorporation	GB	
4. Title of the invention	SEMICONDUCTOR DEVICE	
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	by virtue of Section 7(2)(c) of the Patents Act 1977	
6. How many, if any, additional Patents Forms 7/77 are attached to this form?		
7.	I/We believe that the persons named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to. Signature <i>Matthew Read</i> Date 1 December 2000	
8. Name and daytime telephone number of person to contact in the United Kingdom	MATTHEW READ 020 7600 4212	

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Mark Walton
5 Strand Way
Lower Earley
Reading
Berkshire RG6 4BU

Patents ADP number

734720002

Eiji Kubo
Bessho, Hachiouji-shi
Tokyo 192-0363
Japan

Patents ADP number

8034555001

Tetsuya Nakagawa
5-15-9-503 Hon-cho
Koganei-shi
Tokyo 184-0004
Japan

Patents ADP number

66807231001

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Kosaku Aida
5-11-2 Minami-Hanahata
Adachi-ku
Tokyo 121-0062
Japan

Patents ADP number

8034571001

Nobuya Kasai
1-59-2 Onda-cho
Higashi-Murayama-shi
Tokyo 189-0011
Japan

Patents ADP number

8034589001

Patents ADP number

This Page Blank (uspto)

SEMICONDUCTOR DEVICE

BACKGROUND OF THE INVENTION

The present invention relates to a semiconductor device such as a data processor, a microprocessor or a microcomputer, which includes a CPU and a signal-processing circuit. More particularly, the present invention relates to a technology effectively applicable to generation of a side tone in a hand telephone or the like

Apparatuses such as a hand phone for transmitting and receiving an audio signal in duplex communications have a side-tone function. The side-tone function is a function to combine a voice of the user input from a microphone with a voice received from a communication partner and output the combined voices to a speaker during a conversational communication. For example, in Japanese Patent Laid-open No. Hei 7-240782, there is disclosed a hardware technology whereby an audio signal to be transmitted from an A/D converter is supplied to a variable-gain amplifier, being converted into a side tone added to a voice received from a communication partner during a conversational communication before being output to a speaker through D/A conversion. In addition, a processor is also capable of carrying out side-tone processing by execution of software as is disclosed in Japanese Patent Laid-open No. Hei9-284364.

With the hardware technology for generating a side tone as described above, however, external circuit components such as an amplifier to be added externally to a processor are required, making it virtually impossible to apply the technology to fields like a hand phone where requirements such as a low cost, a small size and thinness are demanded. In the case of the software for side-tone processing, on the other hand, the inventors of the present invention discovered a problem that the processor or a CPU embedded in the processor is occupied by software processing for each audio data so that it is feared that other software processing becomes stagnant. Examples of the other software processing include encoding and decoding processes, compression and error correction based on a control by the processor.

SUMMARY OF THE INVENTION

It is thus an object of the present invention addressing the problems described above to provide a semiconductor device capable of generating a side tone without increasing the magnitude of a load borne by a CPU and without requiring an external circuit component.

The above and other objects as well as novel features of the present invention will become apparent from the description in this specification and accompanying drawings.

An outline of an invention representing those disclosed

in this specification is briefly explained as follows.

In a semiconductor device such as a data processor or a microprocessor, a single semiconductor chip comprises: a digital-signal-processing circuit; a CPU for controlling the digital-signal-processing circuit; and an interface circuit for inputting a digital signal synchronously with a first clock signal and supplying the input digital signal to the digital-signal-processing circuit and for outputting digital data processed by the digital-signal-processing circuit synchronously with the first clock signal, and the interface circuit includes: an input circuit for inputting a digital signal synchronously with the first clock signal and supplying the input digital signal to the digital-signal-processing circuit; a gain-adjusting circuit capable of adjusting a gain of the digital signal supplied to the input circuit; and an output circuit for adding the digital signal with the gain thereof adjusted to a digital signal supplied from the digital-signal-processing circuit and outputting a resulting digital signal synchronously with the first clock signal.

Controlled by the CPU, the digital-signal-processing circuit processes a digital signal received from the input circuit and a digital signal to be supplied to the output circuit. Typically, in response to an interrupt signal, the CPU issues a command to the digital-signal-processing circuit, requesting the circuit to carry out processing operations. The

semiconductor device is provided in a hand phone typically between an analog front end and a high-frequency unit in an application of processing a signal received or transmitted by the hand phone. In this case, the semiconductor device inputs a digital signal to be transmitted from the analog front end synchronously with predetermined cycles set by an audio sampling frequency and processes the digital signal. On the other hand, a signal received from the high-frequency unit is processed and supplied to the analog front end. The digital-signal-processing circuit carries out these pieces of processing in accordance with control executed by the CPU. At that time, the output circuit adds a part of a digital signal received by the input circuit from the front end unit to a digital signal to be supplied to the analog front end. The part of the digital signal received by the input circuit from the front end unit is a signal with the gain thereof adjusted by the gain-adjusting circuit. In this way, a digital signal to be transmitted propagates through a signal path extended from the input circuit through the gain-adjusting circuit to the output circuit and is subjected to the so-called side-tone processing along the signal path. As a result, the side-tone processing can be carried out without execution of software by the CPU wherein, in each sampling period, the CPU would otherwise read out a digital signal from the input circuit and adjust the gain of the digital signal and, in addition, the CPU also would

otherwise read out a digital signal from the output circuit and add the signal with the gain thereof adjusted to the digital signal from the output circuit before supplying back a signal obtained as a result of addition to the output circuit. Thus, it is possible to avoid frequent suspensions of control processing of the CPU by periodical interrupts for triggering the side-tone processing. As a result, a side tone can be generated without increasing the magnitude of a load borne by the CPU and without requiring an external circuit component.

As an embodiment, the input circuit may be designed to comprise an input shift register for inputting and shifting a digital signal synchronously with a first clock signal and an input register for latching a digital signal input and shifted in the input shift register synchronously with a second clock signal. For such an input circuit, the gain-adjusting circuit may be designed to comprise a shifter capable of inputting and shifting a digital signal input and shifted by the input shift register and a gain control register for controlling the number of shift operations carried out by the shifter. In the same way as the input circuit, the output circuit can be designed to comprise an output register for latching digital data processed in the digital-signal processing unit synchronously with the second clock signal, an adder for adding a signal output by the shifter to the latched digital data in the output register and an output shift register for inputting a signal output by

the adder and shifting and outputting the signal synchronously with the first clock signal.

By allowing the CPU to make an access to the gain control register to write data into the register, the gain of a side tone can be controlled by software with ease.

In addition, by allowing the CPU to make an access to the input register to write data into the register, 0 can be set in the register to put transmission in the conversational communication in a mute state. Similarly, by allowing the CPU to make an access to the output register to write data into the register, 0 can be set in the register to put reception in the conversational communication in a mute state. In order to make the registers accessible by the CPU, it is necessary to put the registers in an address space of the CPU or, in a word, to connect the registers to the CPU by using a bus.

As an alternative, the output stage of the input register and the output stage of the output register are each provided with a changeover switch for selecting either the output stage or a value of 0 for a mute state. Select control information for driving the changeover switches is stored in a switch control register. By allowing the CPU to make an access to the switch control register to write data into the register, the selective muting described above can be implemented.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a microprocessor used as an example of a semiconductor device provided by the present invention;

Fig. 2 is an operation time table, which is shown as an example of comparison when an attempt is made to implement a side-tone function in software processing carried out by a CPU;

Fig. 3 is an operation time table showing implementation of a side-tone function by hardware of an interface circuit;

Fig. 4 is a table showing detailed descriptions of registers embedded in the interface circuit;

Fig. 5 is a table showing a relation between the value set in a gain control register and the quantity of a bit shift operation;

Fig. 6 is a table showing results of various kinds of side-tone processing in terms of pieces of data stored in the registers;

Fig. 7 is a diagram showing typical mute processing carried out by using the interface circuit; and

Fig. 8 is a diagram showing another typical mute processing carried out by using the interface circuit.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 is a diagram showing, as an example, a microprocessor 1, which is a typical semiconductor device provided by the present invention. The microprocessor 1 shown

in the figure is a single semiconductor chip typically made of monolithic silicon. As an alternative, the microprocessor 1 can be created on a semiconductor substrate typically by using a CMOS integrated circuit manufacturing technology. The microprocessor 1 shown in Fig. 1 is employed in a hand phone. Provided between an analog front end (AFE) 2 and a high-frequency unit 3, the microprocessor 1 processes a received signal and a signal to be transmitted.

The analog front end 2 shown in Fig. 1 comprises representative components, namely, an A/D converter (ADC) 6 for converting an analog input audio signal input by a microphone 4 into a digital audio signal 5, and a D/A converter (DAC) 8 for converting a digital audio signal 7 output by the microprocessor 1 into an analog signal supplied to a speaker 9. In addition, the analog front end 2 also includes an AGC (Auto Gain Control) amplifier for amplifying an input analog signal and an output amplifier for amplifying an output analog signal. It should be noted that the AGC (Auto Gain Control) amplifier and the output amplifier themselves are not shown in the figure. The high-frequency unit 3 converts a digital signal received from the microprocessor 1 into a high-frequency signal, which is then transmitted from an antenna. In addition, the high-frequency unit 3 detects a high-frequency signal received by the antenna and supplies the detected signal to the microprocessor 1.

The microprocessor 1 comprises a digital-signal-processing circuit (DSP) 10, a CPU 11 for controlling the digital-signal-processing circuit 10, an interface circuit 12 for inputting and outputting signals exchanged between the analog front end 2 and the digital-signal-processing circuit 10, a memory 13 implemented by typically a DRAM (Dynamic Random Access Memory) serving as a work area of the CPU 11 and a storage area for storing a program, a clock pulse generator (CPG) 14, a control register (CREG) 15 and a bus 16.

The CPU 11 fetches an instruction from the memory 13 in accordance with an instruction execution procedure. The CPU 11 decodes the fetched instruction and has an execution unit for executing the instruction in accordance with a result of decoding. The execution unit comprises an arithmetic logic unit (ALU), shifters, general registers, temporary registers, data buffer registers and an address buffer register, which are not shown in the figure. The CPU 11 inputs an interrupt signal IRQ_i shown as a representative. When an input interrupt signal is received, the CPU 11 acquires the address of a program associated with an interrupt cause of the interrupt signal. The address of the program is indicated by an interrupt vector associated with the interrupt signal. The CPU 11 then branches to processing of the program at the acquired address.

The DSP 10 has a processing unit including a product-sum processor and a register file for the processor. Processing

carried out by the DSP 10 is requested by a command issued by the CPU 11. To put it in detail, the DSP 10 decodes the command issued by the CPU 11 and carries out processing such as encoding and compression on data to be transmitted in accordance with a result of decoding. The data to be transmitted is received from the interface circuit 12. The DSP 10 also carries out processing such as decoding and error correction on received data supplied thereto by the high-frequency unit 3. Units such as the interface circuit 12 generate an interrupt signal to the CPU 11 each time a predetermined event occurs. Receiving the interrupt signal, the CPU 11 issues a command to the DSP 10. The DSP 10 may or may not have an addressing function. In the case of a DSP 10 with no addressing function, the CPU 10 generates an address, which the DSP 11 writes data into or reads data from, in accordance with an addressing mode of the command. This scheme prevents the number of addressing-mode types in the microprocessor 1 as a whole from increasing. That is to say, this scheme is devised to give a high priority to consideration of preventing the size of logic for decoding commands and instruction from becoming too large due to an excessively large number of instruction-code types. Thus, this scheme contributes to reduction of the size of the microprocessor 1 or reduction of the scale of logic.

The CPG 14 is a circuit for generating a synchronization clock signal used internally in the microprocessor 1. A clock

signal CLK shown in the figure as a representative is supplied to the interface circuit 12. The CPU 11 is capable of making an access to the control register 15. If the CPU 11 sets an enable bit Ebi of the control register 15 assigned to the interface circuit 12 at a predetermined value such as a logic value of 1, a clock driver 14Drv employed in the CPG 14 is activated, being enabled to output the clock signal CLK. The enable bit Ebi is reset to a logic value of 0 when it is desired to halt the operation of the clock driver 14Drv. In a word, the interface circuit 12 is capable of carrying out operations when the enable bit Ebi is set.

The interface circuit 12 comprises an input circuit 20, a gain-adjusting circuit 21, an output circuit 22 and a control circuit 23. The input circuit 20 inputs a digital signal 5 from the analog front end 2 and outputs the signal to the DSP 10 synchronously with a first clock signal CLK1. The gain-adjusting circuit 21 is capable of adjusting the gain of the digital signal supplied to the input circuit 20. The output circuit 22 adds a digital signal received from the DSP 10 to the digital signal with the adjusted gain and outputs a signal obtained as a result of the addition to the analog front end 2 synchronously with the first clock signal CLK1. That is to say, the interface circuit 12 employed in the microprocessor 1 receives the digital signal 5 from the analog front end 2 synchronously with predetermined cycles set by an audio

sampling frequency and processes the signal 5. On the other hand, the interface circuit 12 processes a signal received from the high-frequency unit 3 and supplies the processed signal to the analog front end 2. At that time, the output circuit 22 adds a part of the digital signal 5 received by the input circuit 20 from the front end unit 2 to a digital signal to be supplied to the analog front end 2. The part of the digital signal 5 received by the input circuit 20 from the front end unit 2 is a signal with the gain thereof adjusted by the gain-adjusting circuit 21. In this way, the digital signal 5 to be transmitted propagates through a signal path extended from the input circuit 20 through the gain-adjusting circuit 21 to the output circuit 22, being subjected to the so-called side-tone processing along the signal path. In the side-tone processing carried out by a hand phone or the like, a part of a voice transmitted from the microphone 4 of the transmitting user in a conversational communication is thus fed back to the speaker of the transmitting user, allowing the transmitting user to transmit a voice in the conversational communication while hearing its own voice.

The following description explains a side-phone function implemented by hardware of the interface circuit 12 in detail.

The input circuit 20 comprises an input shift register 30 for inputting and shifting the digital signal 5 synchronously with typically the first clock signal CLK1, and an input

register 31 for latching a digital signal input and shifted in the input shift register 30 synchronously with a second clock signal CLK2. For such an input circuit, the gain-adjusting circuit 21 is designed to comprise a shifter 33 capable of inputting and shifting a digital signal input and shifted by the input shift register 30 and a gain control register 34 for controlling the number of shift operations carried out by the shifter 33. In the same way as the input shift register, the output circuit 22 is designed to comprise an output register 35 for latching digital data processed in the digital-signal processing unit (DSP) 10 synchronously with the second clock signal CLK2, an adder 36 for adding a signal output by the shifter 33 to the latched data in the output register 35 and an output shift register 37 for inputting a signal output by the adder 36 and shifting and outputting the signal synchronously with the first clock signal CLK1.

The control circuit 23 generates the first and second clock signals CLK1 and CLK2 based on the clock signal CLK. The first clock signal CLK1 has a typical frequency of 128 KHz, which is determined from the audio sampling frequency, even though the frequency of the first clock signal CLK1 does not have to be 128 KHz in particular. The first clock signal CLK1 is also supplied to the analog front end 2 wherein the ADC 6 outputs the digital signal 5 to the input shift register 30 synchronously with the clock signal CLK1. Typically, 1 piece

of audio data is 16 bits in length even though the length does not have to be 16 bits in particular. In this case, the registers 30, 31, 35 and 36 each have a length of 16 bits too. Accordingly, the frequency of the second clock signal CLK2 is set at one sixteenth of that of the first clock signal CLK1, which is 8 KHz corresponding to a period of 125 microseconds. Thus, the digital signal 5 is latched into the input register 31 and transferred to the shifter 33 in 16-bit units. The DSP 10 carries out signal processing such as encoding in units each consisting of typically 160 pieces of audio data even though the size of the unit does not have to be 160 pieces of audio data in particular. The control circuit 23 generates a frame signal FRM having a period of 20 msec, which corresponds to 160 pieces of audio data. For each frame FRM, an interrupt signal IRQi is generated to the CPU 11. The interrupt signal IRQi causes the CPU 11 to branch to instruction execution processing for driving the DSP 10 to process a signal to be transmitted for the next 160 pieces of sample data. It should be noted that the control circuit 23 can be provided in the analog front end 2, or outside the microprocessor 1 and the analog front end 2.

Next, the operation of the interface circuit 12 is explained. An analog conversational transmission signal received from the microphone 4 is converted into a digital audio signal 5 by the ADC 6. The digital signal 5 obtained as a result of the A/D conversion is supplied to the input shift register

30. The digital signal 5 is transmitted from the ADC 6 to the input shift register 30 serially in bit units. As the input shift register 30 becomes full, the audio data is transferred to the input register 31 as data to be transmitted to a communication-partner station in a conversational communication. The audio data is also transferred from the input shift register 30 to the shifter 33 to be subjected to processing of the side-tone function. As described above, the input shift register 30 and the input register 31 each have a length of 16 bits. The side-tone processing is carried out later on also in 16-bit units or units of audio sampling data.

The audio data transferred from the input shift register 30 to the shifter 33 is bit-shifted in the shifter 33 in accordance with a value stored in the gain control register 34. For example, the audio data is shifted to the right by 1 bit if it is desired to have a gain of $1/2$. The adder 36 adds the data bit-shifted by the shifter 33 to data stored in the output register 35, that is, audio data received from the communication-partner station. Data obtained as a result of the addition is stored in the output shift register 37. The CPU 11 is capable of directly setting a value in the gain control register 34.

The digital audio data stored in the output shift register 37 is serially transferred to the DAC 8 for converting the data into an analog signal, which is output to the speaker 9 as a

voice.

It is thus possible to implement the side-tone function by using the hardware of the interface circuit 12 to carry out the operation described above wherein an input voice received from the microphone 4 is transmitted to the communication-partner station, a part of the input voice received from the microphone 4 is added to a voice received from the communication-partner station and a signal obtained as a result of the addition is output to the speaker 9. The part of the input voice is the input voice with the gain thereof adjusted. In this way, the side-tone processing can be carried out without execution of software by the CPU 11 wherein, in each sampling period, the CPU 11 would otherwise read out a digital signal from the input register 31 and adjust the gain of the digital signal and, in addition, the CPU 11 also would otherwise read out a digital signal from the output register 35 and add the signal with the gain thereof adjusted to the digital signal from the output register 35 before supplying a signal obtained as a result of addition to the output shift register 37. Thus, it is possible to avoid frequent suspensions of control processing of the CPU 11 by periodical interrupts for carrying out the side-tone processing. As a result, a side tone can be generated without increasing the magnitude of a load borne by the CPU 11 and without requiring an external circuit component.

The reduction of the magnitude of a load borne by the CPU 11 is explained in more detail as follows. Fig. 2 is an operation time table, which is shown as an example of comparison when an attempt is made to implement a side-tone function in software processing by the CPU 11. Assume that in various kinds of signal processing, the frequency of sampling of audio data in an ordinary hand phone or the like is normally 8 KHz, that is, audio data is sampled at intervals of 125 microseconds, and 1 audio frame consists of 160 samples over a period of 20 msec. In a software technique shown in Fig. 2, an interrupt signal is generated to the CPU 11 for each period to sample audio data, that is, at intervals of 125 microseconds, causing the CPU 11 to carry out side-tone processing Sst by execution of software. For this reason, the CPU 11 temporarily suspends various kinds of ongoing processing at intervals of 125 microseconds to carry out the side-tone processing. After the execution of the side-tone processing, the suspended processing is resumed. In this way, the magnitude of the software processing load borne by the CPU 11 increases. With the hardware of the interface circuit 12, on the other hand, an interrupt signal is generated to the CPU 11 at intervals of 20 msec or for each audio frame, and the load borne by the CPU 11 to carry out the side-tone processing is no longer necessary as shown in Fig. 3. That is to say, the CPU 11 is capable of processing data properly concurrently with pieces of side-tone processing Hst carried

out by the interface circuit 12.

Fig. 4 is a table showing detailed descriptions of the registers embedded in the interface circuit 12. As shown in the figure, the input shift register 30, the input register 31, the output shift register 37 and the output register 35 each have a length of 16 bits whereas the gain control register 34 is 8 bits in length. The input register 31, the output register 35 and the gain control register 34 are placed in the address space of the CPU 11 and data can thus be directly read out and written by the CPU 11 from and into the registers 31, 35 and 34 through the bus 16. Addresses assigned to the input register 31, the output register 35 and the gain control register 34 as shown in Fig. 4 are typical. It should be noted that a prefix 0x appended to each of the addresses indicates that the address is expressed in the hexadecimal format.

In order to adjust the gain of a side tone, the CPU 11 initializes the gain control register 34. Control data stored in the gain control register 34 determines the quantity of a bit shift carried out by the shifter 33, that is, the number of bits by which the contents of the input shift register 30 to be added to the contents of the output register 35 are shifted to the right. Thus, by changing the control data stored in the gain control register 34, the CPU 11 is capable of adjusting the gain of a side tone.

Fig. 5 is a table showing a relation between the value

set in the gain control register 34 and the quantity of a bit shift operation. In this embodiment, the gain control register 34 is 8 bits in length as described above and used for storing 17 different values in the range 0x00 to 0x10 each representing the number of bits by which the audio data in the shifter 33 copied from the input shift register 30 is to be shifted to the right. In the case of a value of 0x02 stored in the gain control register 34, for example, the audio data in the shifter 33 is shifted to the right by 2 bits. The shifted audio data is added to the data stored in the output register 35 by the adder 36 and a result of addition produced by the adder 36 is stored in the output shift register 37. The data stored in the output register 35 is audio data received from the communication-partner station. In this way, the CPU 11 is capable of directly controlling the gain of a side tone by setting a value in the gain control register 34. It should be noted that a value of 16 bits shown in Fig. 5 indicates that no side tone is virtually added.

Fig. 6 is a table showing results of various kinds of side-tone processing in terms of pieces of data stored in the input shift register 30, the gain control register 34, the output register 35, the shifter 33 and the output shift register 37. The data stored in the shifter 33 is data obtained or a result of shifting the data stored in the input shift register 30 to the right. The data stored in the output shift register

37 is data obtained as a result of addition of the data stored in the shifter 33 to the data stored in the output register 35. As shown on the first row of the table, pieces of data stored in the 16-bit input shift register 30, the 8-bit gain control register 34, the 16-bit output register 35, the 16-bit shifter 33 and the 16-bit output shift register 37 are 0x00FF, 0x02, 0x0F00, 0x003F and 0x0F3F respectively. The data 0x003F stored in the shifter 33 is data obtained or a result of shifting the data 0x00FF stored in the input shift register 30 to the right by 2 bits. The data 0x0F3F stored in the output shift register 37 is data obtained as a result of addition of the data 0x003F stored in the shifter 33 to the data 0x0F00 stored in the output register 35.

Fig. 7 is a diagram showing typical mute processing carried out by using the interface circuit 12. As described above, the input register 31 and the output register 35 are placed in the address space of the CPU 11 and data can thus be directly read out and written by the CPU 11 from and into the registers 31 and 35 through the bus 16. The CPU 11 is capable of forcibly setting only audio data to be transmitted to the communication-partner station at 0 of the mute state with the side-tone function operated as it is by storing 0x0000 in the input register 31 through the bus 16. In the same way, the CPU 11 is also capable of forcibly setting only audio data received from the communication-partner station at 0 of the mute state

with the side-tone function operated as it is by storing 0x0000 in the output register 35 through the bus 16.

Fig. 8 is a diagram showing other typical mute processing carried out by using the interface circuit 12. In the embodiment shown in Fig. 8, the output stage of the input register 31 and the output stage of the output register 35 are respectively provided with changeover switches 40 and 41 each for selecting either the output stage or a value of 0. The value of 0 for the changeover switch 40 is stored in a fixed-value output circuit 43 and the value of 0 for the changeover switch 41 is stored in a fixed-value output circuit 44. The fixed-value output circuits 43 and 44 are each implemented by a high-resistance pull-down circuit for generating all 16 bits of 0 or 0x0000. Select control information for driving the changeover switches 40 and 41 is stored in a switch control register 42, which is also mapped onto an address in the address space of the CPU 11. By allowing the CPU 11 to make an access to the switch control register 42 to write data into the register 42 through the bus 16, the selective muting described above can be implemented. Assume that a predetermined bit Di in the switch control register 42 is assigned to the changeover switch 41 as a switch control bit. Similarly, a predetermined bit Dj in the switch control register 42 is assigned to the changeover switch 40 as a switch control bit. By resetting the switch control bits Di and Dj to 0, the changeover switches 41 and 40

are driven to select the outputs of the output register 35 and the input register 31 respectively. By setting the switch control bits Di and Dj at 1, on the other hand, the changeover switches 41 and 40 are each driven to select the value of 0. The transmission of audio data to the communication-partner station can be put in a mute state by the CPU 11 by setting the switch control bit Dj at 1 to drive the changeover switch 40 on the transmission side to select the value of 0 to result in a mute state. In this state, audio data transmitted to the communication-partner station is reset at all 0s. On the other hand, the reception of audio data by this station can be put in a mute state by the CPU 11 by setting the switch control bit Di at 1 to drive the changeover switch 41 on the reception side to select the value of 0. In this state, audio data received by this station is reset at all 0s to result in a mute state. It should be noted that the fixed-value output circuits 43 and 44 can also be implemented by a single circuit common to the changeover switches 40 and 41.

In accordance with the microprocessor 1 described above, by adding a simple digital circuit to the embedded interface circuit 12, the side-tone and mute functions in a hand phone or the like can be implemented by hardware. Thus, it is possible to reduce the cost, the size and the thickness of the hand phone or the like as well as to decrease the magnitude of a software-processing load borne by the CPU.

The invention discovered by the inventor has been exemplified concretely by using an embodiment as described above. It should be noted, however, that the scope of the invention is not limited to the details of the embodiment. It is needless to say that a variety of changes and modifications can be made to the embodiment without departing from the gist and the true spirit of the present invention.

For example, it is possible to mount peripheral circuits such as a ROM or a timer on the semiconductor device provided by the present invention besides the DSP, the CPU and the interface circuit. In addition, the interface circuit does not have to adopt a serial interface but may use a parallel interface instead. Moreover, the present invention can be applied to a wide range and a variety of so-called semiconductor devices including a microprocessor, a data processor, a system LSI, a protocol controller and a mixed chip of a DRAM and a logic LSI.

The following description explains a representative effect exhibited by the present invention disclosed in this specification briefly.

By adding a simple digital circuit comprising a shifter and an adder to an interface circuit employed in a semiconductor device including a CPU and a digital-signal-processing circuit, the side-tone and mute functions in a hand phone or the like can be implemented by hardware. As a result, it is possible to reduce the cost, the size and the thickness of the hand phone

or the like as well as to decrease the magnitude of a software-processing load borne by the CPU.

WHAT IS CLAIMED IS:

1. A semiconductor device comprising a single semiconductor chip including:

a digital-signal-processing circuit;

a CPU controlling said digital-signal-processing circuit; and

an interface circuit inputting a digital signal synchronously with a first clock signal and supplying said input digital signal to said digital-signal-processing circuit and outputting digital data processed by said digital-signal-processing circuit synchronously with said first clock signal,

wherein said interface circuit includes:

an input circuit inputting a digital signal synchronously with said first clock signal and supplying said input digital signal to said digital-signal-processing circuit;

a gain-adjusting circuit adjusting a gain of said digital signal supplied to said input circuit; and

an output circuit adding said digital signal with said gain thereof adjusted to a digital signal supplied from said digital-signal-processing circuit and outputting a resulting digital signal synchronously with said first clock signal.

2. A semiconductor device according to claim 1, wherein said input circuit comprises:

an input shift register inputting and shifting a digital

signal synchronously with said first clock signal; and

an input register latching a digital signal input and shifted in said input shift register synchronously with a second clock signal.

3. A semiconductor device according to claim 2, wherein said gain-adjusting circuit comprises:

a shifter capable of inputting and shifting a digital signal input and shifted by said input shift register; and

a gain control register controlling the number of shift operations carried out by said shifter.

4. A semiconductor device according to claim 3, wherein said output circuit comprises:

an output register latching digital data processed by said digital-signal processing unit synchronously with said second clock signal;

an adder adding a signal output by said shifter to said latched digital data in said output register; and

an output shift register inputting a signal output by said adder and shifting and outputting said signal synchronously with said first clock signal.

5. A semiconductor device according to claim 3 or 4, wherein said CPU is capable of making an access to said gain

control register to write data into said gain control register.

6. A semiconductor device according to claim 4, wherein said CPU is capable of making an access to said input register and said output register to write data into said input and output registers.

7. A semiconductor device according to claim 4, wherein:
an output stage of said input register and an output stage of said output register are each provided with a changeover switch selecting either said output stage or a value of 0;

select control information for driving said changeover switches is stored in a switch control register; and


said CPU is capable of making an access to said switch control register to write data into said switch control register.

8. A semiconductor device according to claim 1, wherein, in response to an interrupt signal, said CPU issues a command to said digital-signal-processing circuit, requesting said digital-signal-processing circuit to carry out processing operations.

ABSTRACT OF THE DISCLOSURE

A semiconductor device comprises a DSP (Digital Signal Processor), a CPU for controlling the DSP and an interface circuit. The interface circuit comprises an input circuit, a gain-adjusting circuit and an output circuit. The input circuit inputs a digital signal and supplies the signal to the DSP synchronously with a first clock signal. The gain-adjusting circuit is capable of adjusting the gain of the digital signal supplied to the input circuit. The output circuit adds a digital signal received from the DSP to the digital signal with the gain thereof adjusted and outputs a signal obtained as a result of the addition synchronously with the first clock signal. A signal path extended from the input circuit through the gain-adjusting circuit to the output circuit forms hardware. A digital signal to be transmitted propagates through the hardware to be subjected to the so-called side-tone processing. As a result, it is possible to provide a semiconductor device capable of generating a side tone without increasing the magnitude of a load borne by a CPU and without requiring an external circuit component.

FIG. 1

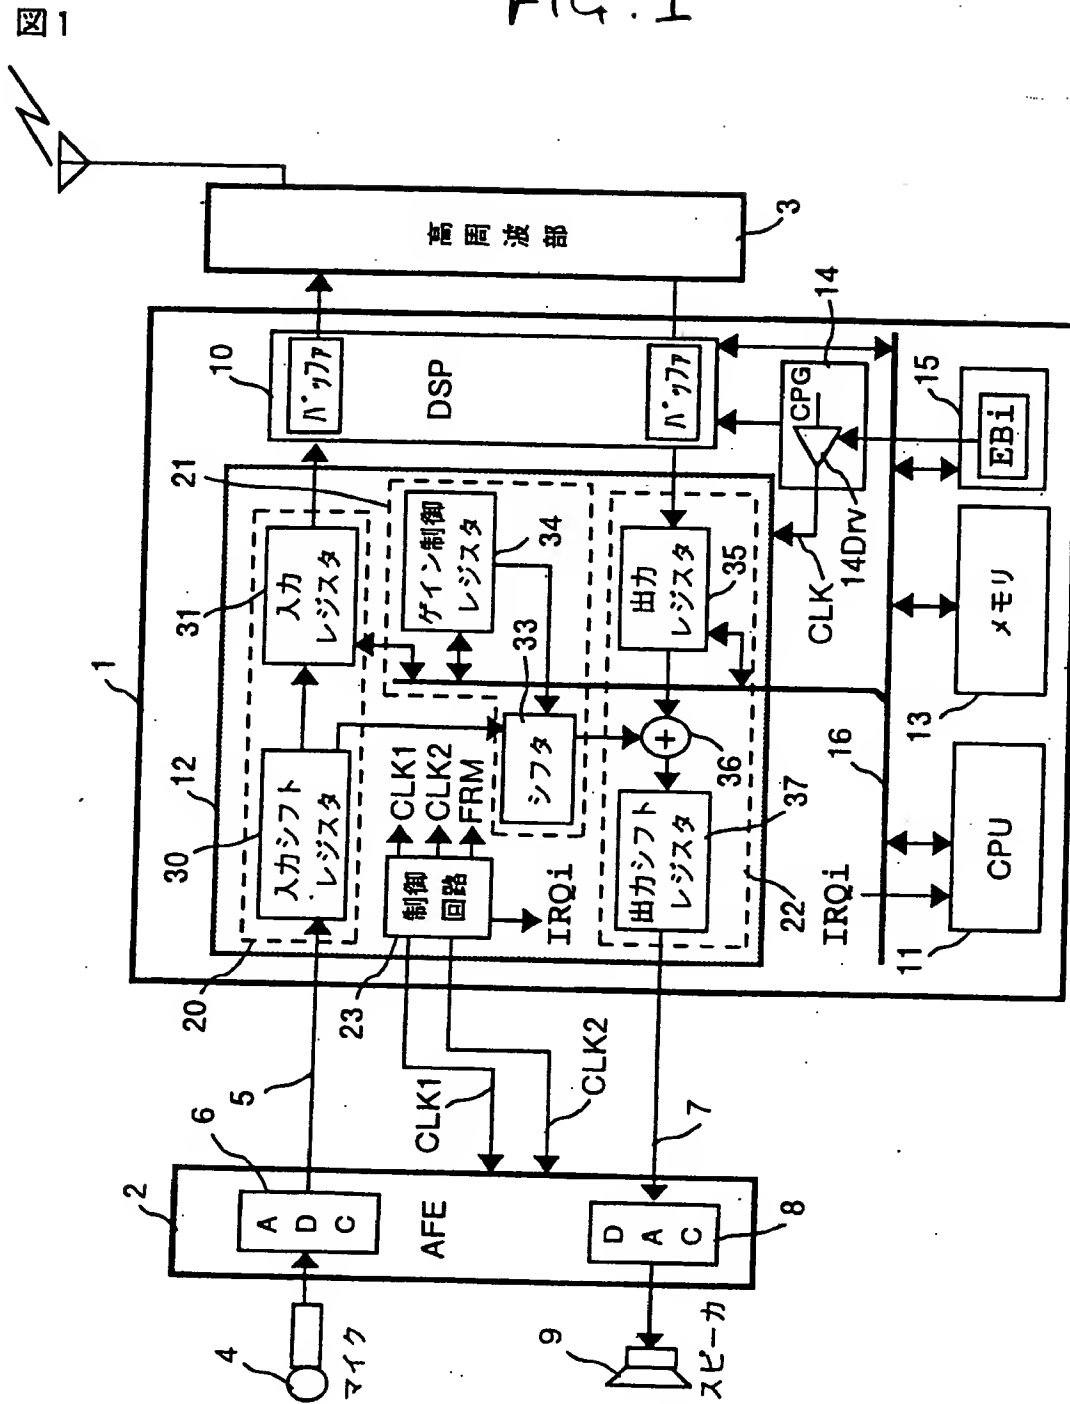

This Page Blank (uspto)

図2

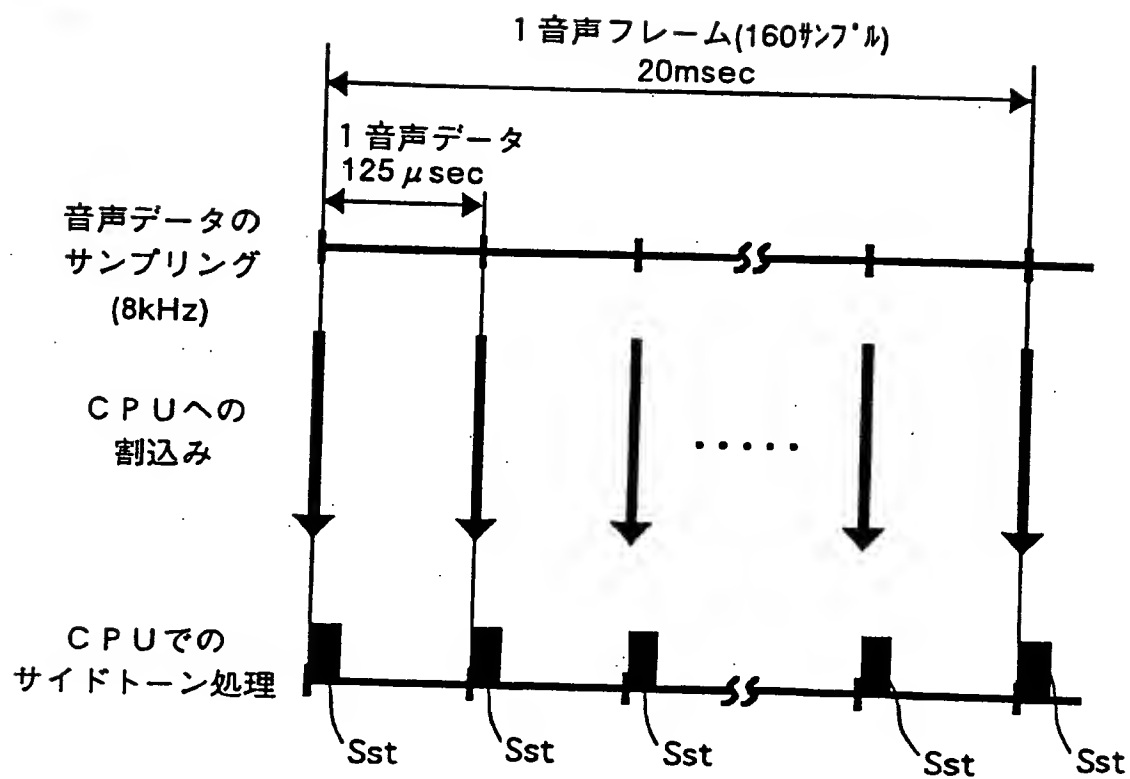


FIG. 2

This Page Blank (uspto)

図 3

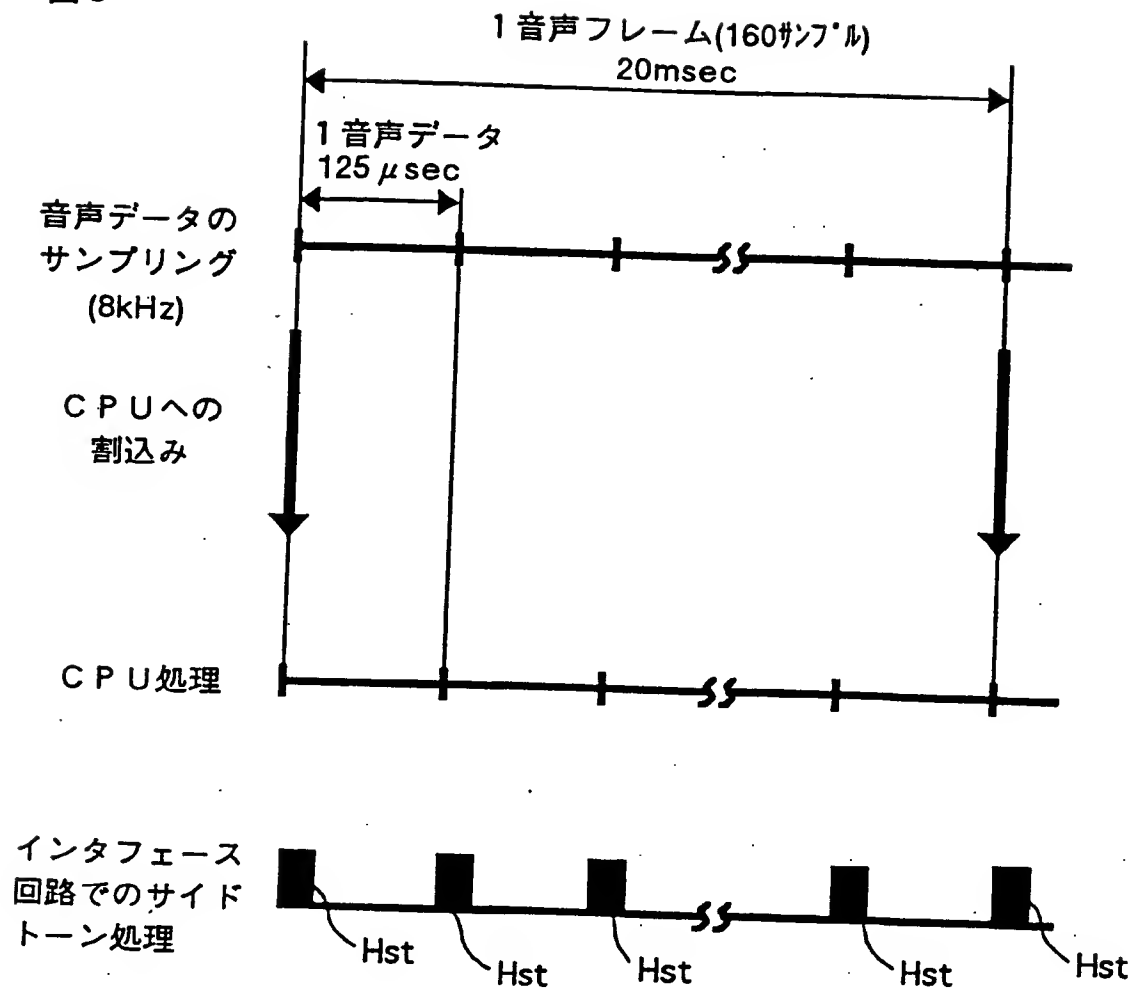


FIG. 3

This Page Blank (uspto)

図 4

レジスタ名	アドレス	R/W (Read/Write)	アクセス サイズ
入力シフト レジスタ30	--	--	16 bit
入力レジスタ 31	0x10000000	R/W	16 bit
出力シフト レジスタ37	--	--	16 bit
出力レジスタ 35	0x10000002	R/W	16 bit
ゲイン制御 レジスタ34	0x10000004	R/W	8 bit
⋮	⋮	⋮	⋮

FIG. 4

This Page Blank (uspto)

H00013001

図 5

ゲイン制御 レジスタ34の値	ビット シフト量
0x00	なし
0x01	1 ビット
0x02	2 ビット
⋮	⋮
0x0F	1 5 ビット
0x10	1 6 ビット

FIG. 5

This Page Blank (uspto)

図 6

No	入力シフト レジスタ30 の値	ゲイン制御 レジスタ34 の値	出力レジスタ 35の値	シフト後 の値	出力シフト レジスタ37 の値
1	0x00FF	0x02	0x0F00	0x003F	0x0F3F
2	0x00FE	0x02	0x0F10	0x003F	0x0F4F
3	0x008F	0x02	0x0F00	0x0023	0x0F23
⋮	⋮	⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮	⋮	⋮

FIG. 6

This Page Blank (uspto)

図 7

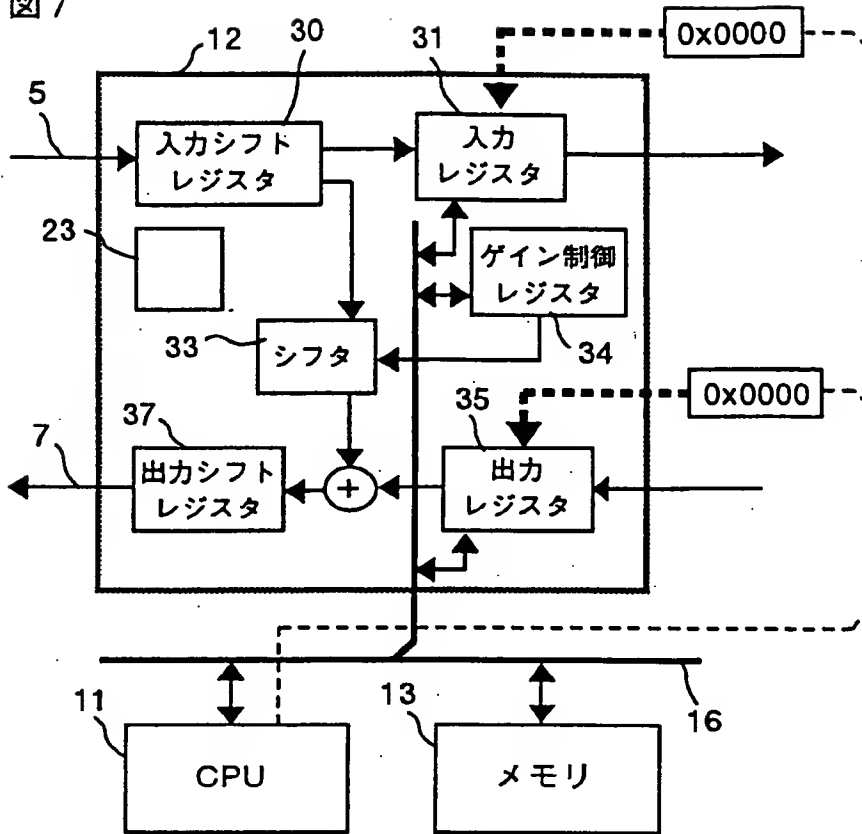


FIG. 7

This Page Blank (uspto)

図 8

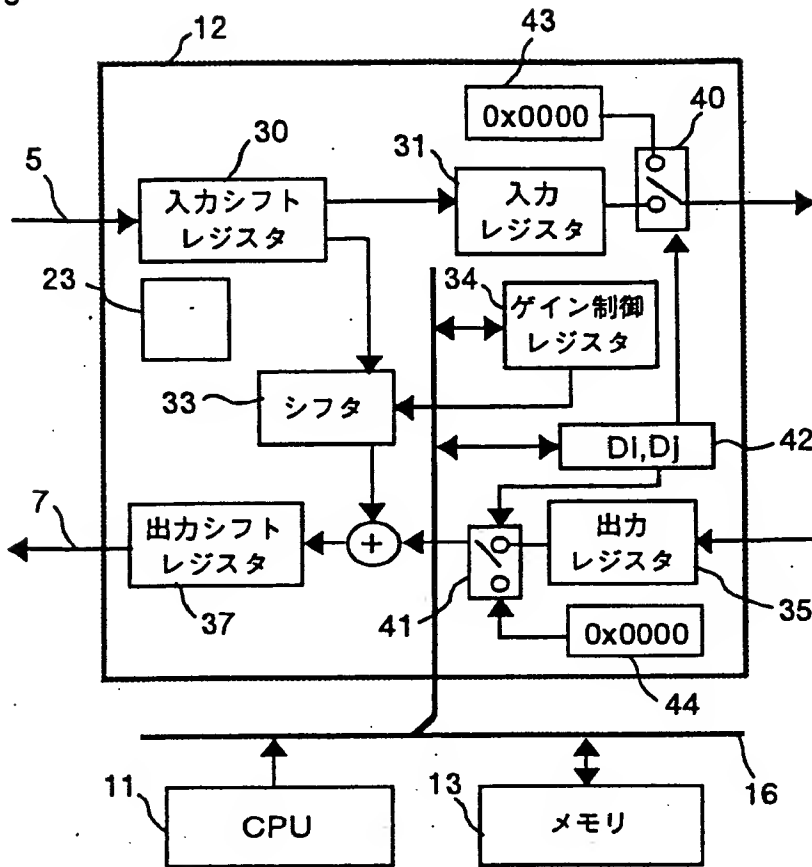


FIG. 8

This Page Blank (uspto)